

## Option 1A

## Parking Lane Closed

Parking-Lane

Thru-Lane

Sidewalk Diversion


No Sidewalk Diversion

Single Lane - One Way

Single Lane - 2 Direction

Multi-Lane

High Risk

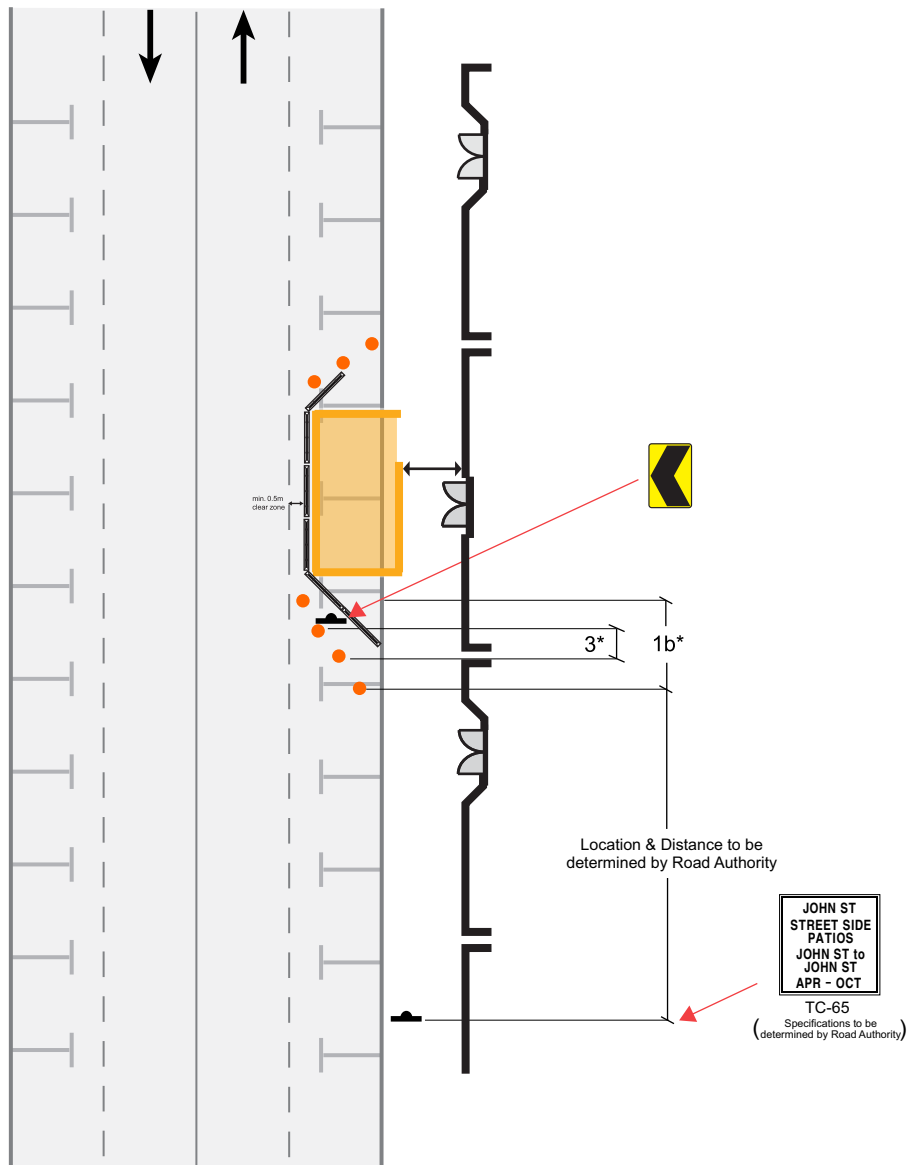

\* Refer to OTM Book 7, Table B

## NOTES

- Barriers to be placed between 25-45 degrees upstream of patio to protect from lateral impact
- Barriers installed to have minimum requirement of MASH test level TL-1 (or equivalent)